



HOT WIRE CUTTERS AND MIXERS



TECHNICAL SOLUTIONS
FOR THERMAL INSULATIONS

ITALIAN MANUFACTURER
Machinery and tools for professional tilers and bricklayers


HOT WIRE CUTTERS



SKU# 1705/1706

EASILY CARRIES OUT STRAIGHT, SKEWED AND PARTIAL CUTS

- 1: Skewed cut on all sides
- 2: Straight cut
- 3: Step cut



USE IT ANYWHERE WITH THE SAME EASE: ON THE GROUND, LEANING ON THE WALL, SELF-STANDING OR ANCHORED ONTO SCAFFOLDING

Self-standing legs and scaffolding anchoring kit available separately




SKU#	VOLTAGE	CUT LENGTH	CUT DEPTH	Kg
1705	230V / 36V	120 cm	25 cm	17
1706	230V / 36V	150 cm	25 cm	19

SKU# 1721

Self-standing kit (Optional)

Bar extension with stop square (Optional)

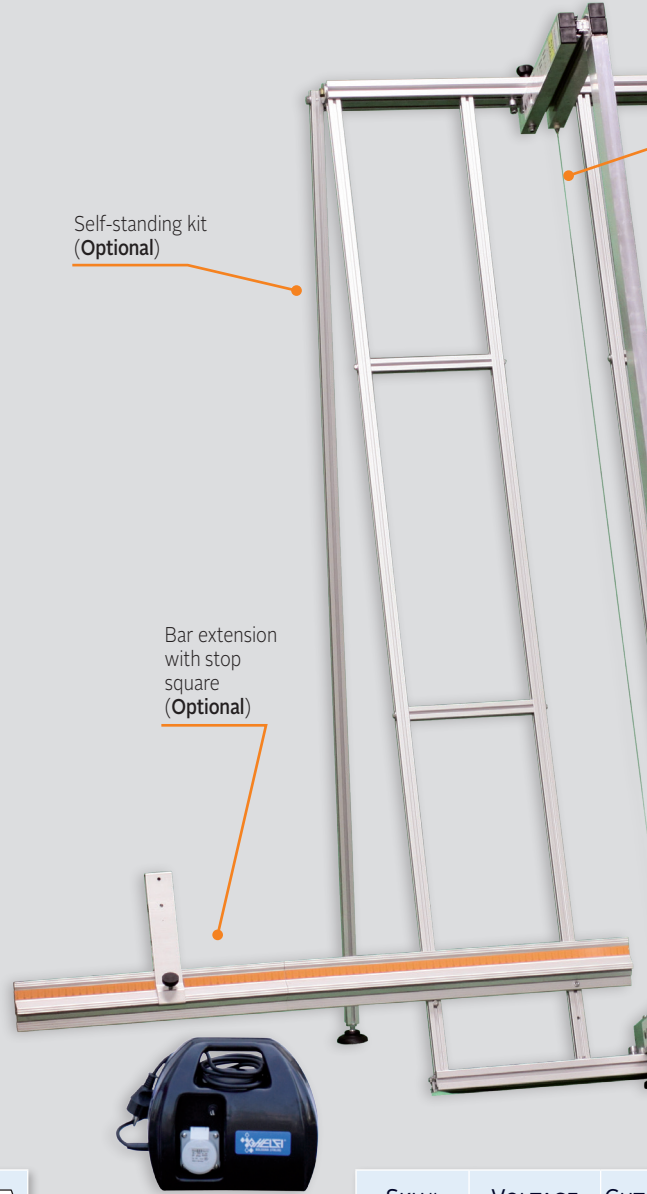

SKU#	VOLTAGE	CUT
1721	230V / 36V	13

EASY TO MOVE AND INSTALL, A SINGLE OPERATOR CAN USE IT EVEN ON SCAFFOLDING

Get going in less than 1 minute



GET OPTIMAL RESULTS WITH
Graduated panel positioning

Ideal for cutting EPS/XPS panels

1705/1706
1721/ 1722/1723



SKU# 1722/1723

Special thermal wire
extra-long duration
(Standard on all models)

Right side
support structure
(Optional)

VERSATILE

Fully removable cutting bow allowing for easy operation on large panels, or where the machine can hardly be installed

ELIMINATE "THERMAL BRIDGES" IN-BETWEEN PANELS, AS PER REGULATORY REQUIREMENTS. ZERO CRUMBLING, MINIMISED WASTE, DRAMATICAL POLLUTION REDUCTION

Get **perfectly matching** adjacent panels thanks to hot wire cut technology precision



HOT-WIRE CUTTING IN FULL SAFETY, HIGH SPEED AND PRECISION

Convenient **electrical switch** allows for wire heating only at cut time.
Heat-up time: **less than 10 seconds**

ROBUST, LIGHTWEIGHT, EASY TO HANDLE


Easy to transport and deploy

LOW 36V VOLTAGE OPERATION

Supplied complete with 250W 220V IP54 professional transformer



LENGTH	CUT DEPTH	
30 cm	26 cm	7

SKU#	VOLTAGE	CUT LENGTH	CUT DEPTH	
1722	230V / 36V	105 cm	26 cm	17
1723	230V / 36V	130 cm	26 cm	19

CUT WITH MAXIMUM EASE
guides



FULL CONTROL ON CUT PRECISION

Cut thickness millimetrically **adjustable** 0-25 cm



MIXERS

1430



MULTIMIX V50 - SKU# 1430

4 speed electrical mixer, **50 litre** capacity. **Two independent paddles** mix uniformly, keeping bucket walls and bottom clean, avoiding deposits and the formation of lumps. **Three different electronically controlled velocities** to mix any product at an optimal speed, plus a **slower rotation setting** for maintaining ready-made mixes. **Steel grid** for thorough homogeneity and density control, and safe addition of water or product during operation. Ideal for mixing **tile adhesives, sealants, concrete, mortar, quartz plasters, screeds and paints.**

4 speed electronic controller



SKU#	VOLTAGE	KW	HP	MIXING PADDLE RPM	RECALL PADDLE RPM	LITRES	⌀ Kg
1430	230V	1,1	1,5	280/360/400/R200	56/72/80/R40	50	33
1400	230V	1,1	1,5	330	66	50	33



SKU# 1405
1200 W

Side shock gum protection

SKU# 1406
1600 W



Electronic variator
Progressive spin-up control
Dual mechanical speed

ROTO - # 1405/1406

1200 and 1600 Watt electrical mixers, **supplied complete with helical M14 paddle.** New generation **two-speed gearbox**, can be operated even on running engine. **Continuous speed variator** for easy setting of optimal rotation frequency in all circumstances. **Automatic electronic Soft-Start device** for gradual paddle spin start-up.

SKU#	VOLTAGE	WATT	RPM	CONNECTOR	PADDLE Ø MM	⌀ Kg
1405	230V	1200	150-500/180-700	M14	120	6
1406	230V	1600	180-380/300-650	M14	140	7



Via Paola Pizzoli 3 - 40012 Calderara di Reno (BO), Italy
Tel. +39 051 311905 - Fax +39 051 380953
www.ghelfi.com - contatti@ghelfi.com